# xE910 Mini PCIe Hardware User Guide

1vv0301006 Rev.7 – 2014-08-06

Making machines talk.

# APPLICABILITY TABLE

| PRODUCT |
| --- |
| HE910 Mini PCIe |
| HE910-D Mini PCIe |
| DE910 Mini PCIe |
| LE910-SVG Mini PCIe |
| LE910-NVG Mini PCIe |
| LE910-NAG Mini PCIe |
| LE910-EUG Mini PCIe |

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

**Notice**

While reasonable efforts have been made to assure the accuracy of this document, Telit assumes no liability resulting from any inaccuracies or omissions in this document, or from use of the information obtained herein. The information in this document has been carefully checked and is believed to be entirely reliable. However, no responsibility is assumed for inaccuracies or omissions. Telit reserves the right to make changes to any products described herein and reserves the right to revise this document and to make changes from time to time in content hereof with no obligation to notify any person of revisions or changes. Telit does not assume any liability arising out of the application or use of any product, software, or circuit described herein; neither does it convey license under its patent rights or the rights of others.

It is possible that this publication may contain references to, or information about Telit products (machines and programs), programming, or services that are not announced in your country. Such references or information must not be construed to mean that Telit intends to announce such Telit products, programming, or services in your country.

**Copyrights**

This instruction manual and the Telit products described in this instruction manual may be, include or describe copyrighted Telit material, such as computer programs stored in semiconductor memories or other media. Laws in the Italy and other countries preserve for Telit and its licensors certain exclusive rights for copyrighted material, including the exclusive right to copy, reproduce in any form, distribute and make derivative works of the copyrighted material. Accordingly, any copyrighted material of Telit and its licensors contained herein or in the Telit products described in this instruction manual may not be copied, reproduced, distributed, merged or modified in any manner without the express written permission of Telit. Furthermore, the purchase of Telit products shall not be deemed to grant either directly or by implication, estoppel, or otherwise, any license under the copyrights, patents or patent applications of Telit, as arises by operation of law in the sale of a product.

**Computer Software Copyrights**

The Telit and 3rd Party supplied Software (SW) products described in this instruction manual may include copyrighted Telit and other 3rd Party supplied computer programs stored in semiconductor memories or other media. Laws in the Italy and other countries preserve for Telit and other 3rd Party supplied SW certain exclusive rights for copyrighted computer programs, including the exclusive right to copy or reproduce in any form the copyrighted computer program. Accordingly, any copyrighted Telit or other 3rd Party supplied SW computer programs contained in the Telit products described in this instruction manual may not be copied (reverse engineered) or reproduced in any manner without the express written permission of Telit or the 3rd Party SW supplier. Furthermore, the purchase of Telit products shall not be deemed to grant either directly or by implication, estoppel, or otherwise, any license under the copyrights, patents or patent applications of Telit or other 3rd Party supplied SW, except for the normal non-exclusive, royalty free license to use that arises by operation of law in the sale of a product.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

**Usage and Disclosure Restrictions**

**License Agreements**

The software described in this document is the property of Telit and its licensors. It is furnished by express license agreement only and may be used only in accordance with the terms of such an agreement.

**Copyrighted Materials**

Software and documentation are copyrighted materials. Making unauthorized copies is prohibited by law. No part of the software or documentation may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language, in any form or by any means, without prior written permission of Telit

**High Risk Materials**

Components, units, or third-party products used in the product described herein are NOT fault-tolerant and are NOT designed, manufactured, or intended for use as on-line control equipment in the following hazardous environments requiring fail-safe controls: the operation of Nuclear Facilities, Aircraft Navigation or Aircraft Communication Systems, Air Traffic Control, Life Support, or Weapons Systems (High Risk Activities"). Telit and its supplier(s) specifically disclaim any expressed or implied warranty of fitness for such High Risk Activities.

**Trademarks**

TELIT and the Stylized T Logo are registered in Trademark Office. All other product or service names are the property of their respective owners.

Copyright © Telit Communications S.p.A.

# Contents

**1. INTRODUCTION ..... 7**
1.1. SCOPE ..... 7
1.2. AUDIENCE ..... 7
1.3. CONTACT INFORMATION, SUPPORT ..... 7
1.4. TEXT CONVENTIONS ..... 8
1.5. RELATED DOCUMENTS ..... 8
**2. OVERVIEW ..... 9**
**3. XE910 MINI PCI EXPRESS CARD CONNECTIONS ..... 10**
3.1. PIN-OUT ..... 10
3.2. ANTENNA CONNECTORS ..... 12
**4. POWER SUPPLY ..... 13**
4.1. POWER SUPPLY REQUIREMENTS ..... 13
4.2. POWER CONSUMPTION ..... 14
**5. GSM/WCDMA/LTE /CDMA RADIO SECTION ..... 15**
5.1. XE910 MINI PCI PRODUCT VARIANTS ..... 15
5.2. TX AND RX CHARACTERISTICS ..... 15
5.3. GSM/WCDMA/LTE/CDMA ANTENNA REQUIREMENTS ..... 16
*5.3.1. GSM/WCDMA/LTE/CDMA Antenna - Installation Guidelines ..... 18*
5.4. ANTENNA DIVERSITY REQUIREMENTS ..... 19
5.5. GNSS RECEIVER ..... 21
*5.5.1. GNSS Performances ..... 21*
*5.5.2. GNSS RF Front End Design ..... 21*
**6. LOGIC LEVEL SPECIFICATIONS ..... 22**
**7. USB PORT ..... 22**
7.1. USB 2.0 HS ..... 22
**8. SIM INTERFACE ..... 23**
**9. CONTROL SIGNALS ..... 24**
9.1. WAKE# ..... 24
9.2. W_DISABLE# ..... 26
9.3. LED_WWAN# ..... 26
9.4. PERST# ..... 27
**10. AUDIO SECTION OVERVIEW ..... 27**
10.1. ELECTRICAL CHARACTERISTICS ..... 28
10.2. CODEC EXAMPLE ..... 28
**11. MECHANICAL SPECIFICATIONS ..... 29**
11.1. WEIGHT ..... 30
11.2. ENVIRONMENTAL REQUIREMENTS ..... 30
**12. PACKING SYSTEM ..... 31**
**13. SAFETY RECOMMANDATIONS ..... 32**

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

**14. CONFORMITY ASSESSMENT ISSUES ..... 33**

1.1 1999/5/EC DIRECTIVE (HE910) ..... 33
14.1. FCC/IC REGULATORY NOTICES (HE910) ..... 36
1.2 1999/5/EC DIRECTIVE (LE910) ..... 38
14.2. FCC/IC REGULATORY NOTICES (LE910) ..... 41
14.3. CONFORMITY ASSESSMENT ISSUES / PROBLÈMES D'ÉVALUATION DE CONFORMITÉ (DE910) ..... 44
14.4. SAFETY RECOMMENDATIONS (DE910) ..... 46

**15. DOCUMENT HISTORY ..... 47**

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 1. Introduction

## 1.1. Scope

The aim of this document is the description of some hardware solutions useful for developing a product with the Telit xE910 Mini PCIe Adapter.

## 1.2. Audience

This document is intended for Telit customers, who are integrators, about to implement their applications using our xE910 Mini PCIe Adapter.

## 1.3. Contact Information, Support

For general contact, technical support, to report documentation errors and to order manuals, contact Telit's Technical Support Center (TTSC) at:

TS-EMEA@telit.com
TS-NORTHAMERICA@telit.com
TS-LATINAMERICA@telit.com
TS-APAC@telit.com

Alternatively, use:
http://www.telit.com/en/products/technical-support-center/contact.php
For detailed information about where you can buy the Telit modules or for recommendations on accessories and components visit:
http://www.telit.com
To register for product news and announcements or for product questions contact Telit's Technical Support Center (TTSC).
Our aim is to make this guide as helpful as possible. Keep us informed of your comments and suggestions for improvements.
Telit appreciates feedback from the users of our information.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 1.4. Text Conventions

***Danger – This information MUST be followed or catastrophic equipment failure or bodily injury may occur.***

***Caution or Warning – Alerts the user to important points about integrating the module, if these points are not followed, the module and end user equipment may fail or malfunction.***

**Tip or Information – Provides advice and suggestions that may be useful when integrating the module.**

All dates are in ISO 8601 format, i.e. YYYY-MM-DD.

## 1.5. Related Documents

- HE910/UE910 AT Commands Reference Guide 80378ST10091a
- HE910 Hardware User Guide 1vv03700925
- Event Monitor Application Note 80000nt10043a
- Digital Voice Interface Application Note 80000NT10004a
- LE910 AT Commands Reference Guide 80378ST10585a
- LE910 Hardware User Guide 1vv03701089
- LE910 Digital Voice Interface Application Note 80000NT11246a
- DE910 Hardware User Guide 1vv03700951

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 2. Overview

The aim of this document is the description of some hardware solutions useful for developing a product that will host the Telit XE910 Mini PCIe Adapter.
In this document all the basic functions of a mobile phone will be taken into account; for each one of them a proper hardware solution will be suggested and eventually the wrong solutions and common errors to be avoided will be evidenced. Obviously this document cannot embrace the whole hardware solutions and products that may be designed. The wrong solutions to be avoided shall be considered as mandatory, while the suggested hardware configurations shall not be considered mandatory, instead the information given shall be used as a guide and a starting point for properly developing your product with the Telit Mini PCIe module.

**NOTICE:**
(EN) The integration of the GSM/GPRS/WCDMA **XE910 Mini PCIe** cellular module within user application shall be done according to the design rules described in this manual.

(IT) L'integrazione del modulo cellulare GSM/GPRS/WCDMA **XE910 Mini PCIe** all'interno dell'applicazione dell'utente dovrà rispettare le indicazioni progettuali descritte in questo manuale.

(DE) Die Integration des **XE910 Mini PCIe** GSM/GPRS/WCDMA Mobilfunk-Moduls in ein Gerät muß gemäß der in diesem Dokument beschriebenen Kunstruktionsregeln erfolgen.

(SL) Integracija GSM/GPRS/WCDMA **XE910 Mini PCIe** modula v uporabniški aplikaciji bo morala upoštevati projektna navodila, opisana v tem priročniku.

(SP) La utilización del modulo GSM/GPRS/WCDMA **XE910 Mini PCIe** debe ser conforme a los usos para los cuales ha sido deseñado descritos en este manual del usuario.

(FR) L'intégration du module cellulaire GSM/GPRS/WCDMA **XE910 Mini PCIe** dans l'application de l'utilisateur sera faite selon les règles de conception décrites dans ce manuel.

(HE) האינטגרטור מתבקש ליישם את ההנחיות המפורטות במסמך זה בתהליך האינטגרציה של המודם הסלולרי עם המוצר. **XE910 Mini PCIe**

The information presented in this document is believed to be accurate and reliable. However, no responsibility is assumed by Telit Communications S.p.A. for its use, nor any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent rights of Telit Communications S.p.A. other than for circuitry embodied in Telit products. This document is subject to change without notice.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 3. xE910 Mini PCI express card connections

## 3.1. PIN-OUT

This product has a standard Mini PCI express connector, excepting the (4) audio signals which use normally reserved connectors.

| Pin | Signal | I/O | Function | Type |
|---|---|---|---|---|
| **Power Supply** | | | | |
| **2** | 3V3_AUX | O | 3.3V supply | Power |
| **24** | 3V3 | O | 3.3V supply | Power |
| **39** | 3V3_AUX | O | 3.3V supply | Power |
| **41** | 3V3_AUX | O | 3.3V supply | Power |
| **52** | 3V3_AUX | O | 3.3V supply | Power |
| **4** | GND | - | Ground | Power |
| **9** | GND | - | Ground | Power |
| **15** | GND | - | Ground | Power |
| **18** | GND | - | Ground | Power |
| **21** | GND | - | Ground | Power |
| **26** | GND | - | Ground | Power |
| **27** | GND | - | Ground | Power |
| **29** | GND | - | Ground | Power |
| **34** | GND | - | Ground | Power |
| **35** | GND | - | Ground | Power |
| **37** | GND | - | Ground | Power |
| **40** | GND | - | Ground | Power |
| **43** | GND | - | Ground | Power |
| **50** | GND | - | Ground | Power |
| **SIM Card Interface** | | | | |
| **8** | SIMVCC | O | External SIM signal – Power supply for the SIM | 1.8 / 3V |
| **10** | SIMIO | I/O | External SIM signal - Data I/O | 1.8 / 3V |
| **12** | SIMCLK | O | External SIM signal – Clock | 1.8 / 3V |
| **14** | SIMRST | O | External SIM signal – Reset | 1.8 / 3V |
| **USB** | | | | |
| **36** | USB D- | I/O | USB differential Data (-) | 0.3…2.8V |
| **38** | USB D+ | I/O | USB differential Data (+) | 0.3…2.8V |

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

| Pin | Signal | I/O | Function | Type |
|---|---|---|---|---|
| **Miscellaneous Functions** | | | | |
| **1** | WAKE# | O | Active low signal used to wake up the system from stand-by | 3.3V |
| **20** | WDISABLE# | I | Active low signal for wireless disabling (Flight mode) | 3.3V |
| **22** | PERST# | I | Active low functional reset to the card | 3.3V |
| **42** | LED_WWAN# | O | Active low, open drain signal for WWAN LED driving, used to provide module's status indication | 3.3V…5V |
| **Digital Voice Interface (DVI)** | | | | |
| **45** | PCM_CLK | I/O | Digital Audio Interface (CLK) | CMOS 1.8V |
| **47** | PCM_RX | I | Digital Audio Interface (RX) | CMOS 1.8V |
| **49** | PCM_TX | O | Digital Audio Interface (TX) | CMOS 1.8V |
| **51** | PCM_SYNC | I/O | Digital Audio Interface (SYNC) | CMOS 1.8V |
| **N.C.** | | | | |
| **3** | | - | | |
| **5** | | - | | |
| **6** | | - | | |
| **7** | | - | | |
| **11** | | - | | |
| **13** | | - | | |
| **16** | | - | | |
| **17** | | - | | |
| **19** | | - | | |
| **23** | | - | | |
| **25** | | - | | |
| **28** | | - | | |
| **30** | | - | | |
| **31** | | - | | |
| **32** | | - | | |
| **33** | | - | | |
| **44** | | - | | |
| **46** | | - | | |
| **48** | | - | | |

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 3.2. Antenna Connectors

The xE910 Mini PCIe adapter is equipped with a set of 50 Ω RF U.FL. connectors from Hirose U.FL-R-SMT-1(10).

The available connectors are:

- Main RF antenna (ANT)
- RX Diversity Antenna (DIV)
- GNSS Antenna (GPS)

See the picture on the right for their position on the interface.

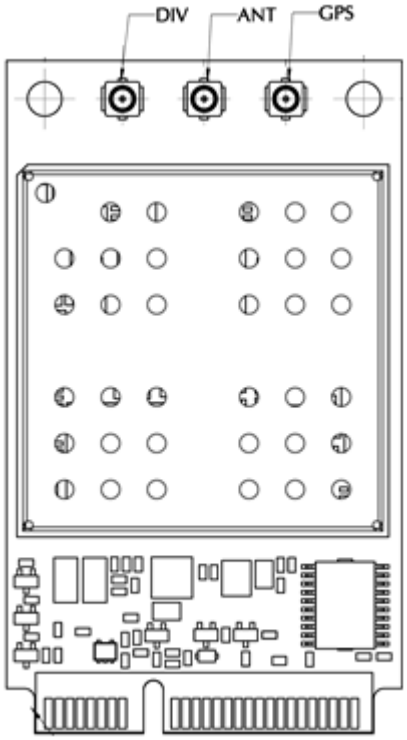


The presence of all the connectors is depending on the product characteristics and supported functionalities.

For more information about mating connectors, visit the website http://www.hirose-connectors.com/

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 4. Power Supply

The power supply circuitry and board layout are a very important part in the full product design and they strongly reflect on the product overall performances, hence read the requirements carefully and the guidelines that will follow for a proper design.

## 4.1. Power Supply Requirements

The external power supply must be connected to the pins 2, 39, 41, 52 and must fulfill the following requirements:

| POWER SUPPLY | |
|---|---|
| Nominal Supply Voltage | 3.3 V |
| Normal Operating Voltage Range | 3.00 V÷ 3.60 V |

**NOTE:**

The Operating Voltage Range MUST never be exceeded; care must be taken when designing the application's power supply section to avoid having an excessive voltage drop.

If the voltage drop is exceeding the limits it could cause a Power Off of the module.

**NOTE:**

Overshoot voltage (regarding MAX Operating Voltage) and drop in voltage (regarding MIN Operating Voltage) MUST never be exceeded;

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 4.2. Power Consumption

Please refer to the Module's Hardware User guide for the details

The GSM system is made in a way that the RF transmission is not continuous, else it is packed into bursts at a base frequency of about 216 Hz, and the relative current peaks can be as high as about 2.4A. Therefore the power supply has to be designed in order to withstand with these current peaks without big voltage drops; this means that both the electrical design and the board layout must be designed for this current flow. If the voltage drop during the peak current absorption is too much, then the device may even shutdown as a consequence of the supply voltage drop.

**NOTE:**

The electrical design for the Power supply should be made ensuring it will be capable of a peak current output of at least 2.4 A.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 5. GSM/WCDMA/LTE /CDMA Radio Section

## 5.1. xE910 Mini PCI Product Variants

The following table is listing the main differences between the xE910 variants:

| Product | 2G Bands | 3G Bands | LTE Bands | CDMA Bands | GNSS |
|---|---|---|---|---|---|
| **LE910-EUG** | GSM 900, DCS1800 | B5(850), B8 (900), B1 (2100) | B20 (800), B3 (1800), B7 (2600) | NO | YES |
| **LE910-NAG** | GSM 850, PCS 1900 | B5(850), B2(1900) | B17(700), B5(850), B4(1700), B2(1900) | NO | YES |
| **LE910-NVG** | Not supported | B5(850), B2(1900) | B13(700), B4(1700) | NO | YES |
| **LE910-SVG** | Not supported | Not supported | B13(700), B4(1700) | NO | YES |
| **HE910** | GSM 850, GSM 900, DCS1800, PCS 1900 | FDD B1, B2, B4, B5, B8 | Not supported | NO | YES |
| **HE910-D** | GSM 850, GSM 900, DCS1800, PCS 1900 | FDD B1, B2, B4, B5, B8 | Not supported | NO | NO |
| **DE910-DUAL** | Not supported | Not supported | Not supported | BC0, BC1 | YES |

## 5.2. TX and RX characteristics

Please refer to the Module's Hardware User guide for the details

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 5.3. GSM/WCDMA/LTE/CDMA Antenna Requirements

The antenna connection is one of the most important aspect in the full product design as it strongly affects the product overall performances, hence read carefully and follow the requirements and the guidelines for a proper design.

The xE910 Mini PCIe adapter is provided with three RF connectors.
The available connectors are:

- Main RF antenna (ANT)
- RX Diversity Antenna (DIV)
- GNSS Antenna (GPS)

Connecting cables between the module and the antenna must have 50 Ω impedance.
If the impedance of the module is mismatched, RF performance is reduced significantly.
If the host device is not designed to use the module's diversity or GPS antenna, terminate the interface with a 50Ω load.

| MAIN ANTENNA REQUIREMENTS for LE910-EUG | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth (GSM/EDGE)** | GSM900 : 80 MHz<br>GSM1800(DCS) : 170 MHz |
| **Bandwidth (WCDMA)** | WCDMA band I(2100) : 250 MHz<br>WCDMA band V(850) : 70 MHz<br>WCDMA band VIII(900) : 80 MHz |
| **Bandwidth (LTE)** | LTE band III(1800) : 170 MHz<br>LTE Band VII(2600) : 190 MHz<br>LTE Band XX(800) : 71 MHz |
| **Impedance** | 50 ohm |
| **Input power** | > 33dBm(2 W) peak power in GSM<br>> 24dBm Average power in WCDMA & LTE |
| **VSWR absolute max** | ≤ 10:1 (limit to avoid permanent damage) |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

| MAIN ANTENNA REQUIREMENTS for LE910-NAG | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth (GSM/EDGE)** | GSM850 : 70 MHz<br>GSM1900(PCS) : 140 MHz |
| **Bandwidth (WCDMA)** | WCDMA band II(1900) : 140 MHz<br>WCDMA band V(850) : 70 MHz |
| **Bandwidth (LTE)** | LTE Band II(1900) : 140 MHz<br>LTE Band IV(1700) : 445 MHz<br>LTE Band V (850) : 70 MHz<br>LTE Band XVII(700) : 42 MHz |
| **Impedance** | 50 ohm |
| **Input power** | > 33dBm(2 W) peak power in GSM<br>> 24dBm Average power in WCDMA & LTE |
| **VSWR absolute max** | ≤ 10:1 (limit to avoid permanent damage) |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

| MAIN ANTENNA REQUIREMENTS for LE910-NVG | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth (WCDMA)** | WCDMA band II(1900) : 140 MHz<br>WCDMA band V(850) : 70 MHz |
| **Bandwidth (LTE)** | LTE Band IV(1700) : 445 MHz<br>LTE Band XIII(700) : 41 MHz |
| **Impedance** | 50 ohm |
| **Input power** | > 24dBm Average power in WCDMA & LTE |
| **VSWR absolute max** | ≤ 10:1 (limit to avoid permanent damage) |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

| MAIN ANTENNA REQUIREMENTS for LE910-SVG | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth (LTE)** | LTE Band IV(1700) : 445 MHz<br>LTE Band XIII(700) : 41 MHz |
| **Impedance** | 50 ohm |
| **Input power** | > 24dBm Average power |
| **VSWR absolute max** | ≤ 10:1 (limit to avoid permanent damage) |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

| MAIN ANTENNA REQUIREMENTS for HE910 | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth (GSM/EDGE)** | 70 MHz in GSM850, 80 MHz in GSM900, 170 MHz in DCS & 140 MHz PCS band |
| **Bandwidth (WCDMA)** | 70 MHz in WCDMA Band V<br>80 MHz in WCDMA Band VIII<br>460 MHz in WCDMA Band IV<br>140 MHz in WCDMA Band II<br>250 MHz in WCDMA Band I |
| **Impedance** | 50 ohm |
| **Input power** | > 33dBm(2 W) peak power in GSM<br>> 24dBm Average power in WCDMA |
| **VSWR absolute max** | ≤ 10:1 (limit to avoid permanent damage) |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

| MAIN ANTENNA REQUIREMENTS for DE910-DUAL | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth** | 70 MHz in CDMA BC0<br>140 MHz in CDMA BC1 |
| **Gain** | Gain < 5.12dBi in CDMA BC0<br>Gain < 6.12dBi in CDMA BC1 |
| **Impedance** | 50 ohm |
| **Input power** | > 24.4dBm Average Power in CDMA |
| **VSWR absolute max** | ≤ 5:1 (Limit to avoid permanent damage) |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

Please refer to the Module's Hardware User guide for the details

### 5.3.1. GSM/WCDMA/LTE/CDMA Antenna - Installation Guidelines

- Install the antenna in a place covered by the GSM/WCDMA/LTE/CDMA signal.
- If the device antenna is located greater then 20cm from the human body and there are no co-located transmitters then the Telit FCC/IC approvals can be re-used by the end product
- If the device antenna is located less than 20cm from the human body or there are no co-located transmitters then the additional FCC/IC testing may be required for the end product (Telit FCC/IC approvals cannot be reused)
- Antenna shall not be installed inside metal cases
- Antenna shall be installed also according antenna manufacturer instructions.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 5.4. Antenna Diversity Requirements

This product includes an input for a second RX antenna to improve the radio sensitivity. The function is called Antenna Diversity.

| DIVERSITY ANTENNA REQUIREMENTS for LE910-EUG | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth (WCDMA)** | WCDMA band I(2100) : 250 MHz<br>WCDMA band V(850) : 70 MHz<br>WCDMA band VIII(900) : 80 MHz |
| **Bandwidth (LTE)** | LTE band III(1800) : 170 MHz<br>LTE Band VII(2600) : 190 MHz<br>LTE Band XX(800) : 71 MHz |
| **Impedance** | 50 ohm |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

| DIVERSITY ANTENNA REQUIREMENTS for LE910-NAG | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth (WCDMA)** | WCDMA band II(1900) : 140 MHz<br>WCDMA band V(850) : 70 MHz |
| **Bandwidth (LTE)** | LTE Band II(1900) : 140 MHz<br>LTE Band IV(1700) : 445 MHz<br>LTE Band V (850) : 70 MHz<br>LTE Band XVII(700) : 42 MHz |
| **Impedance** | 50 ohm |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

| DIVERSITY ANTENNA REQUIREMENTS for LE910-NVG | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth (WCDMA)** | WCDMA band II(1900) : 140 MHz<br>WCDMA band V(850) : 70 MHz |
| **Bandwidth (LTE)** | LTE Band IV(1700) : 445 MHz<br>LTE Band XIII(700) : 41 MHz |
| **Impedance** | 50 ohm |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

| DIVERSITY ANTENNA REQUIREMENTS for LE910-SVG | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth (LTE)** | LTE Band IV(1700) : 445 MHz<br>LTE Band XIII(700) : 41 MHz |
| **Impedance** | 50 ohm |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

| DIVERSITY ANTENNA REQUIREMENTS for HE910 | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth (GSM/EDGE)** | 70 MHz in GSM850, 80 MHz in GSM900 & 140 MHz PCS band |
| **Bandwidth (WCDMA)** | 70 MHz in WCDMA Band V<br>80 MHz in WCDMA Band VIII<br>140 MHz in WCDMA Band II<br>250 MHz in WCDMA Band I |
| **Impedance** | 50 ohm |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

| DIVERSITY ANTENNA REQUIREMENTS for DE910-DUAL | |
|---|---|
| **Frequency range** | Depending by frequency band(s) provided by the network operator, the customer shall use the most suitable antenna for that/those band(s) |
| **Bandwidth** | 70 MHz in CDMA BC0<br>140 MHz in CDMA BC1 |
| **Impedance** | 50 ohm |
| **VSWR recommended** | ≤ 2:1 (limit to fulfil all regulatory requirements) |

The second Rx antenna should not be located in the close vicinity of main antenna. In order to improve Diversity Gain, Isolation and reduce mutual interaction, the two antennas should be located at the maximum reciprocal distance possible, taking into consideration the available space in the application.

**NOTE1:**

On HE910 the diversity is not supported on the FDD BAND IV and DCS band.

**NOTE2:**

In case of HE910, if the RX Diversity is not used/connected, disable the Diversity functionality using the AT#RXDIV command (ref to the At User guide for the proper syntax).

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 5.5. GNSS Receiver

The XE910 Mini PCIe adapter integrates a GNSS receiver that could be used in Standalone mode and in A-GPS (assisted GPS), according to the different configurations.

The supported technologies are described in the following table:

| Product | GPS | GLONASS |
|---|---|---|
| **LE910-EUG** | YES | YES |
| **LE910-NAG** | YES | YES |
| **LE910-NVG** | YES | YES |
| **LE910-SVG** | YES | YES |
| **HE910** | YES | NO |
| **HE910-D** | NO | NO |
| **DE910-DUAL** | YES | YES |

### 5.5.1. GNSS Performances

Please refer to the Module's Hardware User guide for the details

### 5.5.2. GNSS RF Front End Design

The xE910 Mini PCIe adapter contains an integrated LNA and pre-select SAW filter.
This allows the module to work well with a passive GPS antenna. If the antenna cannot be located near the xE910, then an active antenna (that is, an antenna with a low noise amplifier built in) can be used.

**NOTE:**

Please refer to the Module's Hardware User Guide for detailed information about GPS operating modes and RF signal requirements.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 6. Logic level specifications

The following table shows logic level specifications used in the xE910 interface circuits:

**Absolute Maximum Ratings -Not Functional**

| Parameter | Min | Max |
|---|---|---|
| Input level on any digital pin (CMOS 1. with respect to ground | -0.5V | 3.6V |

**Operating Range – DC Specification for 3V3 Logic Signalling**

| Symbol | Parameter | Min | Max |
|---|---|---|---|
| 3V3, 3V3_AUX | Supply voltage | 3.0V | 3.6V |
| $V_{IH}$ | Input high level | 2.0V | 3.6V |
| $V_{IL}$ | Input low level | -0.5V | 0.8V |
| $V_{OH}$ | Output high level | 2.0V | 3.6V |
| $V_{OL}$ | Output low level | -0.5V | 0.8V |
| $I_{IN}$ | Input Leakage Current | -10µA | 10µA |
| $I_{OL}$ | Output Low Current for open-drain signals | 4mA | |

# 7. USB Port

The xE910 Mini PCIe adapter includes one integrated universal serial bus (USB) transceiver, compliant with the standard USB 2.0 for high speed (HS) operations.

## 7.1. USB 2.0 HS

This port is compliant with the USB 2.0 specifications.
The following table lists the available signals:

| PAD | Signal | I/O | Function | Type |
|---|---|---|---|---|
| **38** | USB_D+ | I/O | USB differential Data (+) | 0.3…2.8V |
| **36** | USB_D- | I/O | USB differential Data (-) | 0.3…2.8V |

The USB interface is powered directly from the 3V3 supply.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 8. SIM interface

The SIM pins provide the connections necessary to interface to a SIM socket located on the host device. Voltage levels over this interface comply with 3GPP standards.

| SIM Card Interface | | | | |
|---|---|---|---|---|
| 8 | SIMVCC | O | External SIM signal – Power supply for the SIM | 1.8 / 3V |
| 10 | SIMIO | I/O | External SIM signal - Data I/O | 1.8 / 3V |
| 12 | SIMCLK | O | External SIM signal – Clock | 1.8 / 3V |
| 14 | SIMRST | O | External SIM signal – Reset | 1.8 / 3V |

Following picture depicts the external SIM recommended connections:

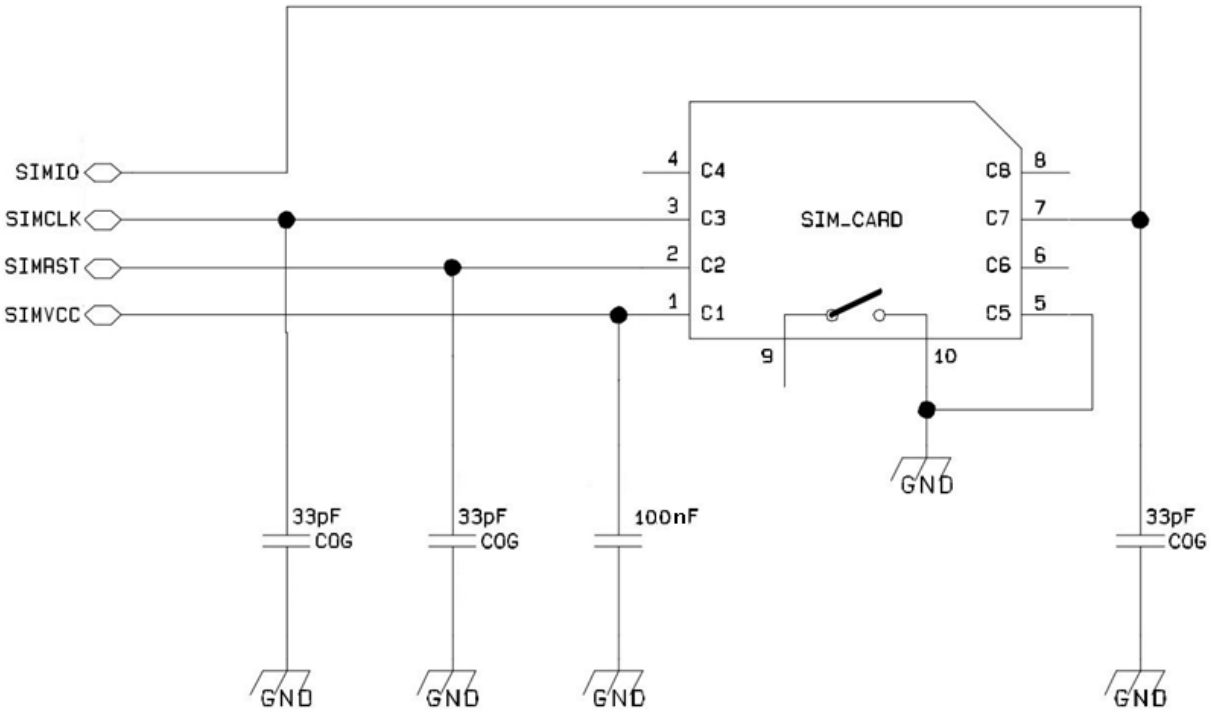


**NOTE:** DO NOT TERMINATE PINS 8, 10, 12, 14 WHEN USING MODEL INCLUDING SIM CARD HOLDER.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 9. Control signals

The XE910 Mini PCIe provides signals for module control, as described in the following table:

| Pin | Signal | I/O | Function | Type |
|---|---|---|---|---|
| **1** | WAKE# | O | Active low signal used to wake up the system from stand-by | 3.3V |
| **20** | W_DISABLE# | I | Active low signal for wireless disabling (Airplane mode) | 3.3V |
| **22** | PERST# | I | Active low functional reset to the card | 3.3V |
| **42** | LED_WWAN# | O | Active low, open drain signal for WWAN LED driving, used to provide module's status indication | 3.3V…5V |

## 9.1. WAKE#

WAKE# is driven, by default, by the module according the PCI Express Mini Card Electromechanical Specification Revision 1.2.

**NOTE:** WAKE# IS NOT SUPPORTED IN HOST USING PCI EXPRESS MINI CARD ELECTROMECHANICAL SPECIFICATION REVISION 1.1 AND BELOW.

**NOTE:** THIS SIGNAL IS NOT ACTIVE BY DEFAULT. IF DESIRED IT CAN BE CONFIGURED REMAPPING AN EVENT UNDER MONITORING THROUGH AT#EVMONI. FOR DETAILS REFER TO THE AT COMMAND USER GUIDE

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

Following picture shows the internal WAKE# driver:

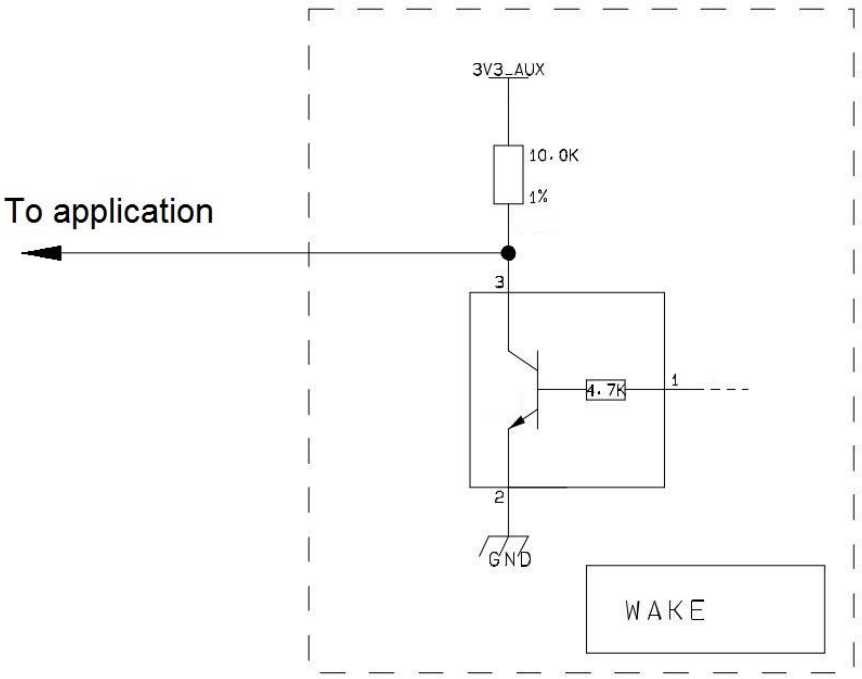


WAKE# output may be connected to an edge sensitive application input (e.g. a microcontroller input with IRQ enabled). No external pull-up is needed, since it is internally implemented.

**EXAMPLE:** In the following example, a RING monitor activates the WAKEUP signal. (cf. Event Monitor App.Note 80000nt10043a)

```
AT#ENAEVMONI=0                                  //disable all events
AT#GPIO=3,0,1                                   //Set GPIO3=>'0', "WAKE signal reset"
AT#ENAEVMONICFG=3,1,2                           //AT port setting
AT#EVMONI="RING",0,1,3                          //event 0-RING, after 3 rings
AT#EVMONI="RING",0,0,"AT#GPIO=3,1,1"            //GPIO3=>'1', "WAKE signal active"
AT#EVMONI="RING",1                              //event 0-RING enabled
AT#EVMONI="GPIO1",1,1,3                         //event 1-GPIO3
AT#EVMONI="GPIO1",1,2,1                         //when goes hi
AT#EVMONI="GPIO1",1,3,5                          //after 5s
AT#EVMONI="GPIO1",1,0," AT#GPIO=3,0,1"          //Set GPIO3=>'0', "WAKE signal reset"
AT#EVMONI="GPIO1",1                              //event 1-GPIO3 enabled
AT#ENAEVMONI=1                                  //enable all events
```

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 9.2. W_DISABLE#

W_DISABLE# is used to force the module to shut down. Thanks to its internal pull-up, leaving this pin unconnected allows the module to operate normally. This switch follows the behavior as described in the PCI-Express Mini Card specification.

## 9.3. LED_WWAN#

LED_WWAN# is driven, by default, by the module according the PCI Express Mini Card Electromechanical Specification Revision 1.1. If desired, LED behavior can be configured by adjusting software settings. The following picture shows the internal LED_WWAN# driver and its recommended connection to a LED:

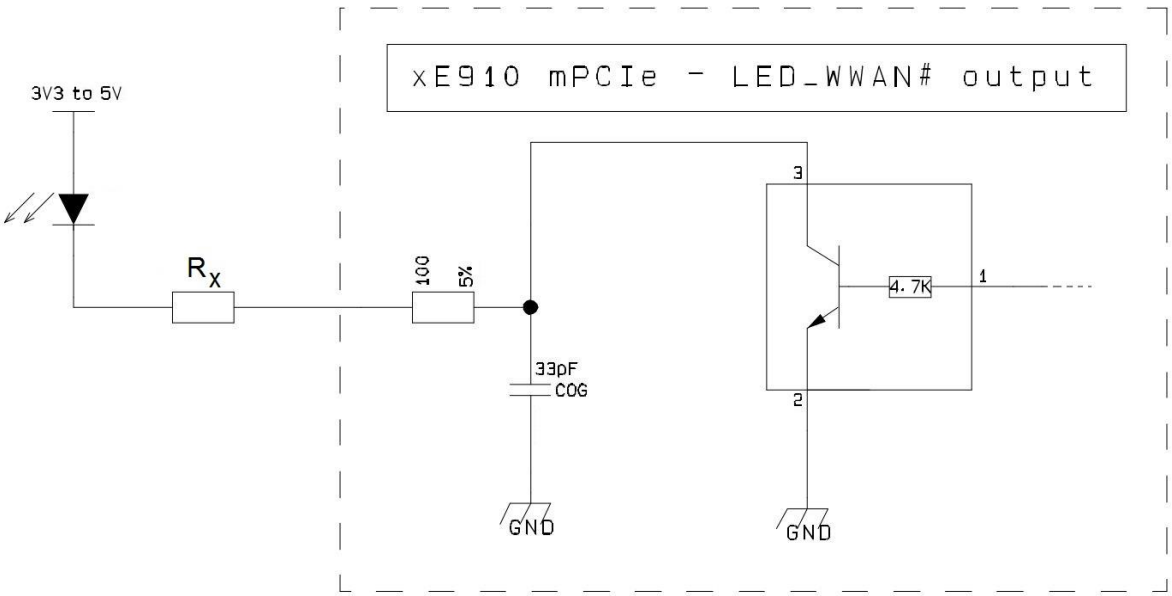


$R_x$ should be dimensioned according to typical voltage drop on application LED and to its supply voltage (3V3 to 5V).

**NOTE:** THIS SIGNAL IS NOT ACTIVE BY DEFAULT. REFER TO AT#SLED DESCRIPTION IN THE AT COMMAND USER GUIDE

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 9.4. PERST#

**Reset Signal**

| Signal | Function | I/O | Pin |
|---|---|---|---|
| PERST# * | Phone reset | I | 22 |

PERST# * is used to reset the xE910. Whenever this signal is pulled low, the xE910 is reset. When the device is reset it stops any operation. After the release of the reset the xE910 is unconditionally restarted, without doing any detach operation from the network where it is registered. The reset signal must not be used to normally restart the device, but only as an emergency exit in the rare case the device remains stuck waiting for some network response.
PERST#* is internally controlled on start-up to achieve a proper power-on reset sequence, so there's no need to control this pin on start-up. It may only be used to reset a device already on that is not responding to any command.

**NOTE:**

Do not use this signal to power cycle the xE910 Mini PCIe. Use the AT#SHDN command instead.

**Reset Signal Operating levels**:

| Signal | Min | Max |
|---|---|---|
| RESET Input high | 2.0V | 3.6V |
| RESET Input low | -0.5V | 0.8V |

* this signal is not internally pulled up so an external pull-up is required whenever the pin is not used.

If PERST# is used, then it **must always be connected to a push-pull output** in order to allow the internal circuitry to correctly execute power on reset and under voltage lockout functions.

# 10. Audio Section Overview

The xE910 Module does not provide an Analog Audio section.
One DIGITAL AUDIO bus is available.
In order to develop an application including an Analog Audio it is necessary to add a dedicated CODEC on the Application design.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 10.1. Electrical Characteristics

The product provides a PCM Digital Audio Interface (DVI) on the following Pins:

| Digital Voice Interface (DVI) | | | | |
|---|---|---|---|---|
| **45** | PCM_CLK | I/O | Digital Audio Interface (CLK) | CMOS 1.8V |
| **47** | PCM_RX | I | Digital Audio Interface (RX) | CMOS 1.8V |
| **49** | PCM_TX | O | Digital Audio Interface (TX) | CMOS 1.8V |
| **51** | PCM_SYNC | I/O | Digital Audio Interface (SYNC) | CMOS 1.8V |

More details on the use of digital audio can be found in Module's DVI application Note.

**NOTE:** THESE SIGNALS ARE 1.8V, NOT COMPATIBLE WITH Mini PCIe BUSES. THIS IS AN ADVANCED VOICE FUNCTIONALITY AND THE HOST SHOULD TAKE CARE OF CORRECT COMPATIBILITY.

## 10.2. CODEC Example

Please refer to the Module's Digital Voice Application Note

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 11. Mechanical specifications

The xE910 Mini PCIe adapters have been designed to be compliant with a standard lead-free SMT process.
Moreover, it is compatible with the Mini PCIe card 52-pin card edge-type connector.
The position of the antenna connectors is shown in the following picture.
Soldering pads are present on the back side of the adapter board to allow the optional mounting of a sim-holder. Starting from p/n HEPCxyyy204Tzzz the carrier board has been unified to the same used on the product DE910 Mini PCIe.

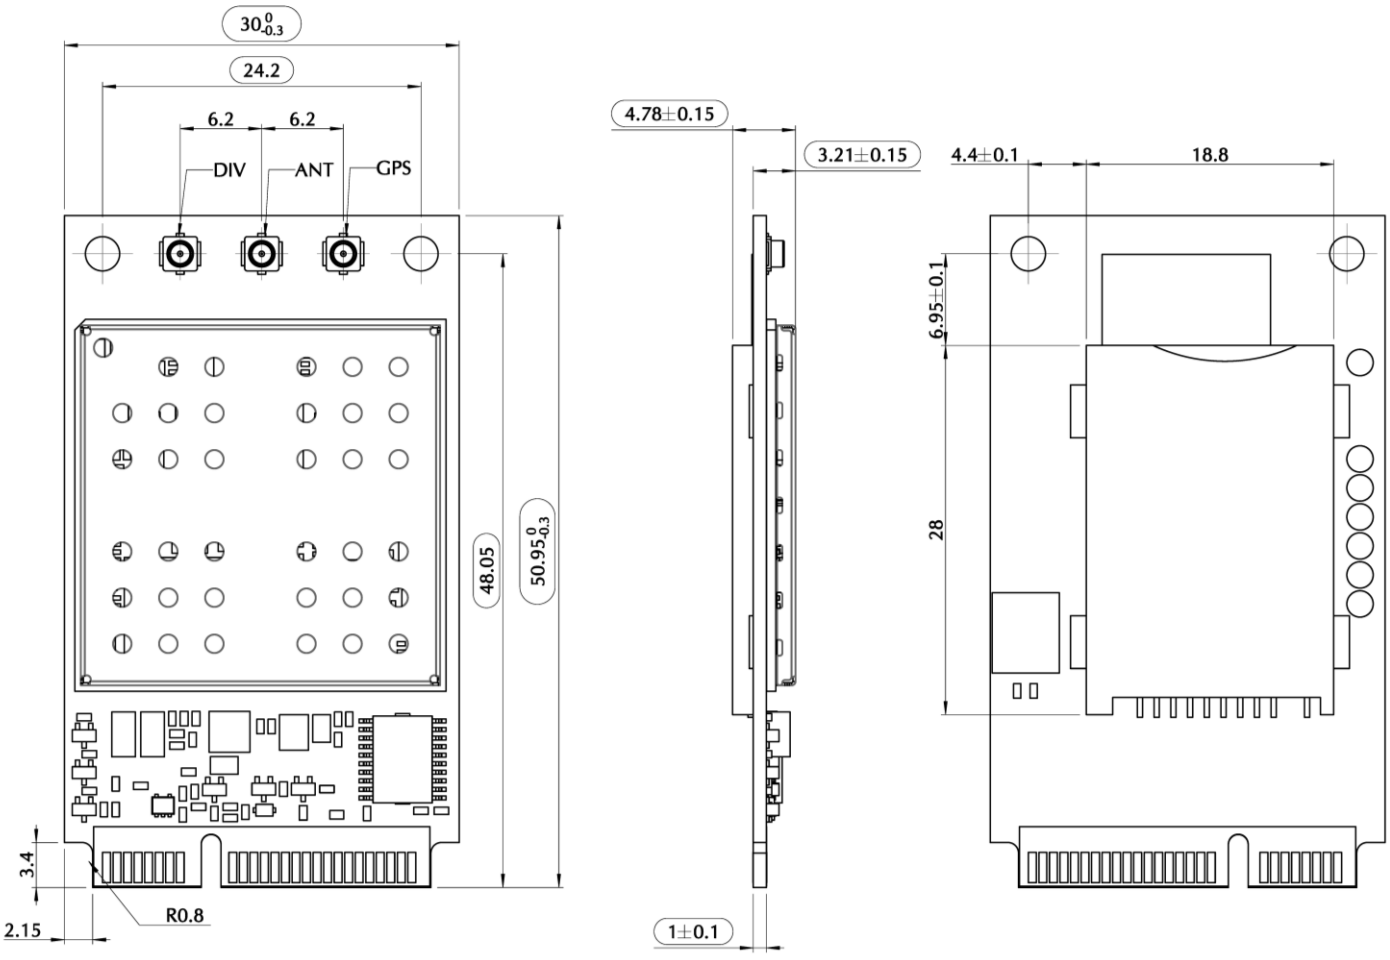

The Telit xE910 Mini PCIe adapter overall dimensions are:

- Length: 51.0 mm
- Width: 30 mm
- Thickness: 3.2 mm
- Thickness(SIM holder version): 4.78 mm

The module complies with the standard dimensions specified in the *PCI Express Mini Card Electromechanical Specification Revision 1.1*

## 11.1. WEIGHT

The Telit xE910 Mini PCIe adapter weight is about 10 grams.

## 11.2. ENVIRONMENTAL REQUIREMENTS

**Temperature range**

| | |
|---|---|
| Storage and operating Temperature Range | -40° ~ +85° C |

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 12. Packing system

The XE910 Mini PCIe modules are packaged on trays of ***20*** pieces each.

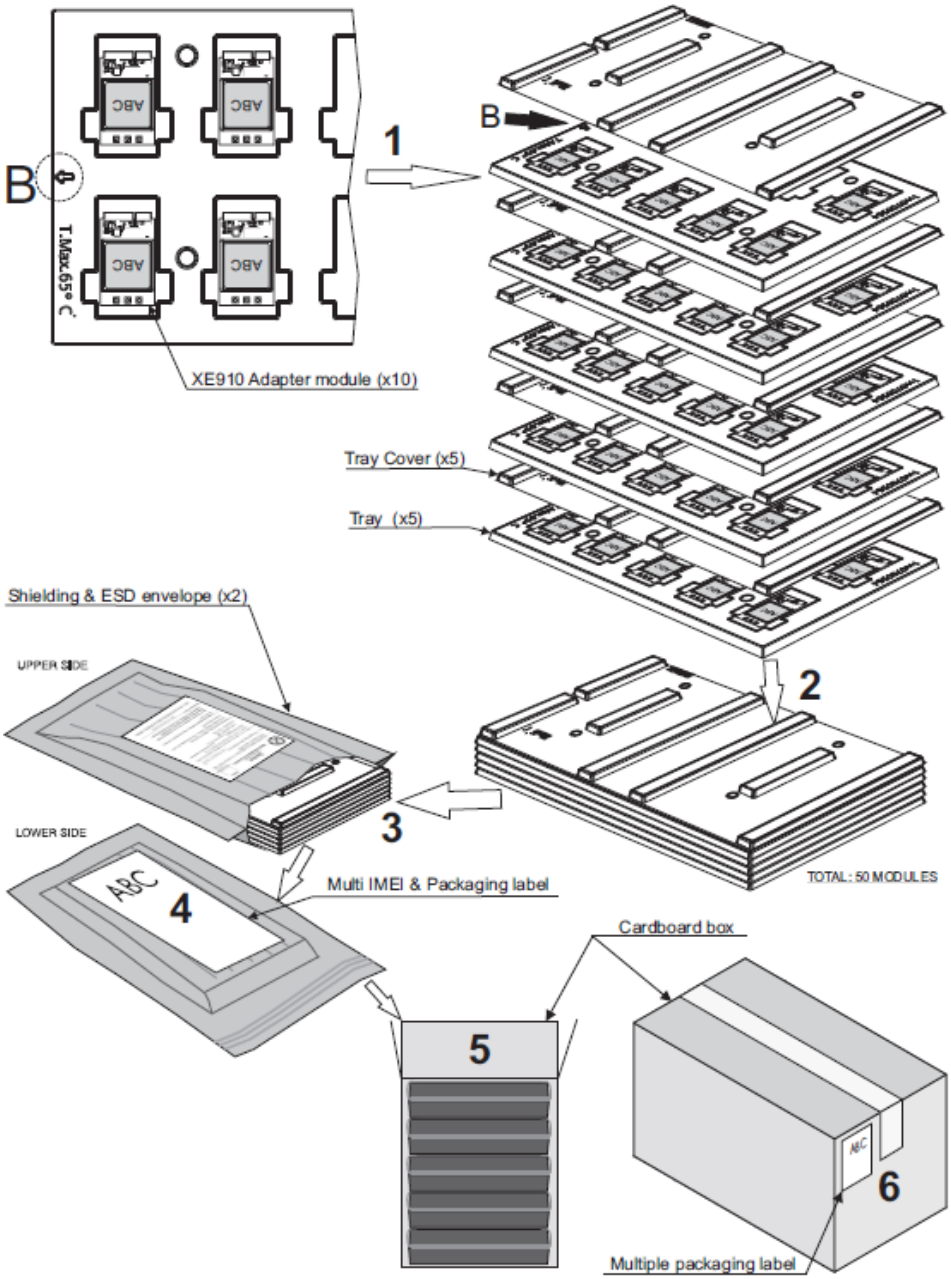

# 13. SAFETY RECOMMANDATIONS

READ CAREFULLY

Be sure the use of this product is allowed in the country and in the environment required. The use of this product may be dangerous and has to be avoided in the following areas:

- Where it can interfere with other electronic devices in environments such as hospitals, airports, aircrafts, etc
- Where there is risk of explosion such as gasoline stations, oil refineries, etc

It is rthe esponsibility of the user to enforce the country regulation and the specific environment regulation.
Do not disassemble the product; any mark of tampering will compromise the warranty validity.
We recommend following the instructions of the hardware user guides for a correct wiring of the product. The product has to be supplied with a stabilized voltage source and the wiring has to be conforming to the security and fire prevention regulations.
The product has to be handled with care, avoiding any contact with the pins because electrostatic discharges may damage the product itself. Same cautions have to be taken for the SIM, checking carefully the instruction for its use. Do not insert or remove the SIM when the product is in power saving mode.
The system integrator is responsible for the functioning of the final product; therefore, care has to be taken to the external components of the module, as well as any project or installation issue, because the risk of disturbing the GSM network or external devices or having impact on the security. Should there be any doubt, please refer to the technical documentation and the regulations in force.
Every module has to be equipped with a proper antenna with specific characteristics. The antenna has to be installed with care in order to avoid any interference with other electronic devices and has to guarantee a minimum distance from the body (20 cm). In case this requirement cannot be satisfied, the system integrator has to assess the final product against the SAR regulation.

The European Community provides some Directives for the electronic equipments introduced on the market. All the relevant information's are available on the European Community website:

http://ec.europa.eu/enterprise/sectors/rtte/documents/

The text of the Directive 99/05 regarding telecommunication equipments is available, while the applicable Directives (Low Voltage and EMC) are available at:

http://ec.europa.eu/enterprise/sectors/electrical

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 14. Conformity assessment issues

The following chapters are related to the module soldered on the carrier board

## 1.1 1999/5/EC Directive (HE910)

The HE910, HE910-D modules have been evaluated against the essential requirements of the 1999/5/EC Directive.

| | |
|---|---|
| Bulgarian | С настоящето Telit Communications S.p.A. декларира, че 2G/3G module отговаря на съществените изисквания и другите приложими изисквания на Директива 1999/5/ЕС. |
| Czech | Telit Communications S.p.A. tímto prohlašuje, že tento 2G/3G module je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES. |
| Danish | Undertegnede Telit Communications S.p.A. erklærer herved, at følgende udstyr 2G/3G module overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF. |
| Dutch | Hierbij verklaart Telit Communications S.p.A. dat het toestel 2G/3G module in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG. |
| English | Hereby, Telit Communications S.p.A., declares that this 2G/3G module is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. |
| Estonian | Käesolevaga kinnitab Telit Communications S.p.A. seadme 2G/3G module vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele. |
| German | Hiermit erklärt Telit Communications S.p.A., dass sich das Gerät 2G/3G module in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet. |
| Greek | ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Telit Communications S.p.A. ΔΗΛΩΝΕΙ ΟΤΙ 2G/3G module ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ. |
| Hungarian | Alulírott, Telit Communications S.p.A. nyilatkozom, hogy a 2G/3G module megfelel a vonatkozó alapvetõ követelményeknek és az 1999/5/EC irányelv egyéb elõírásainak. |
| Finnish | Telit Communications S.p.A. vakuuttaa täten että 2G/3G module tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen. |
| French | Par la présente Telit Communications S.p.A. déclare que l'appareil 2G/3G module est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE. |
| Icelandic | Hér með lýsir Telit Communications S.p.A. yfir því að 2G/3G module er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC |

| | |
|---|---|
| Italian | Con la presente Telit Communications S.p.A. dichiara che questo 2G/3G module è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE. |
| Latvian | Ar šo Telit Communications S.p.A. deklarē, ka 2G/3G module atbilst Direktī vas 1999/5/EK būtiskajām prasī bām un citiem ar to saistī tajiem noteikumiem. |
| Lithuanian | Šiuo Telit Communications S.p.A. deklaruoja, kad šis 2G/3G module atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas. |
| Maltese | Hawnhekk, Telit Communications S.p.A., jiddikjara li dan 2G/3G module jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Dirrettiva 1999/5/EC. |
| Norwegian | Telit Communications S.p.A. erklærer herved at utstyret 2G/3G module er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF. |
| Polish | Niniejszym Telit Communications S.p.A. oświadcza, że 2G/3G module jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC |
| Portuguese | Telit Communications S.p.A. declara que este 2G/3G module está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE. |
| Slovak | Telit Communications S.p.A. týmto vyhlasuje, že 2G/3G module spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES. |
| Slovenian | Telit Communications S.p.A. izjavlja, da je ta 2G/3G module v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES. |
| Spanish | Por medio de la presente Telit Communications S.p.A. declara que el 2G/3G module cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE. |
| Swedish | Härmed intygar Telit Communications S.p.A. att denna 2G/3G module står I överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG. |

In order to satisfy the essential requirements of 1999/5/EC Directive, the HE910 modules are compliant with the following standards:

| | |
|---|---|
| RF spectrum use (R&TTE art. 3.2) | EN 300 440-2 V1.4.1<br>EN 301 511 V9.0.2<br>EN 301 908-1 V4.2.1<br>EN 301 908-2 V4.2.1 |
| EMC (R&TTE art. 3.1b) | EN 301 489-1 V1.8.1<br>EN 301 489-3 V1.4.1<br>EN 301 489-7 V1.3.1<br>EN 301 489-24 V1.5.1 |
| Health & Safety (R&TTE art. 3.1a) | EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 |

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

The HE910-D modules are compliant with the following standards:

| | |
|---|---|
| RF spectrum use (R&TTE art. 3.2) | EN 301 511 V9.02<br>EN 301 908-1 V4.2.1<br>EN 301 908-2 V4.2.1 |
| EMC (R&TTE art. 3.1b) | EN 301 489-1 V1.8.1<br>EN 301 489-7 V1.3.1<br>EN 301 489-24 V1.5.1 |
| Health & Safety (R&TTE art. 3.1a) | EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 |

The conformity assessment procedure referred to in Article 10 and detailed in Annex IV of Directive 1999/5/EC has been followed with the involvement of the following Notified Body:

AT4 wireless, S.A.
Parque Tecnologico de Andalucía
C/ Severo Ochoa 2
29590 Campanillas – Málaga
SPAIN
Notified Body No: 1909

Thus, the following marking is included in the product:

CE 1909

The full declaration of conformity can be found on the following address:
http://www.telit.com/

There is no restriction for the commercialisation of the HE910, HE910-D modules in all the countries of the European Union.

Final product integrating this module must be assessed against essential requirements of the 1999/5/EC (R&TTE) Directive. It should be noted that assessment does not necessarily lead to testing. Telit Communications S.p.A. recommends carrying out the following assessments:

| | |
|---|---|
| RF spectrum use (R&TTE art. 3.2) | It will depend on the antenna used on the final product. |
| EMC (R&TTE art. 3.1b) | Testing |
| Health & Safety (R&TTE art. 3.1a) | Testing |

Alternately, assessment of the final product against EMC (Art. 3.1b) and Electrical safety (Art. 3.1a) essential requirements can be done against the essential requirements of the EMC and the LVD Directives:

- Low Voltage Directive 2006/95/EC and product safety
- Directive EMC 2004/108/EC for conformity for EMC

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 14.1. FCC/IC Regulatory notices (HE910)

**Modification statement**

Telit has not approved any changes or modifications to this device by the user. Any changes or modifications could void the user's authority to operate the equipment.

*Telit n'approuve aucune modification apportée à l'appareil par l'utilisateur, quelle qu'en soit la nature. Tout changement ou modification peuvent annuler le droit d'utilisation de l'appareil par l'utilisateur.*

**Interference statement**

This device complies with Part 15 of the FCC Rules and Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

*Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.*

**Wireless notice**

This equipment complies with FCC and IC radiation exposure limits set forth for an uncontrolled environment. The antenna should be installed and operated with minimum distance of 20 cm between the radiator and your body. Antenna gain must be below:

| Frequency band | HE910, HE910-D |
|---|---|
| GSM 850/FDD V | 5.22 dBi |
| PCS 1900/FDD II | 3.31 dBi |
| FDD IV | 6.45 dBi |

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

*Cet appareil est conforme aux limites d'exposition aux rayonnements de la IC pour un environnement non contrôlé. L'antenne doit être installé de façon à garder une distance minimale de 20 centimètres entre la source de rayonnements et votre corps. Gain de l'antenne doit être ci-dessous:*

| ***Bande de fréquence*** | ***HE910, HE910-D*** |
|---|---|
| *GSM 850/FDD V* | *5.22 dBi* |
| *PCS 1900/FDD II* | *3.31 dBi* |
| *FDD IV* | *6.45 dBi* |

*L'émetteur ne doit pas être colocalisé ni fonctionner conjointement avec à autre antenne ou autre émetteur.*

**FCC Class B digital device notice**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 1.2 1999/5/EC Directive (LE910)

The LE910-EUG module has been evaluated against the essential requirements of the 1999/5/EC Directive.

| | |
|---|---|
| Bulgarian | С настоящето Telit Communications S.p.A. декларира, че 2G/3G/LTE module отговаря на съществените изисквания и другите приложими изисквания на Директива 1999/5/ЕС. |
| Czech | Telit Communications S.p.A. tímto prohlašuje, že tento 2G/3G/LTE module je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES. |
| Danish | Undertegnede Telit Communications S.p.A. erklærer herved, at følgende udstyr 2G/3G/LTE module overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF. |
| Dutch | Hierbij verklaart Telit Communications S.p.A. dat het toestel 2G/3G/LTE module in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG. |
| English | Hereby, Telit Communications S.p.A., declares that this 2G/3G/LTE module is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC. |
| Estonian | Käesolevaga kinnitab Telit Communications S.p.A. seadme 2G/3G/LTE module vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele. |
| German | Hiermit erklärt Telit Communications S.p.A., dass sich das Gerät 2G/3G/LTE module in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet. |
| Greek | ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Telit Communications S.p.A. ΔΗΛΩΝΕΙ ΟΤΙ 2G/3G/LTE module ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ. |
| Hungarian | Alulírott, Telit Communications S.p.A. nyilatkozom, hogy a 2G/3G/LTE module megfelel a vonatkozó alapvetõ követelményeknek és az 1999/5/EC irányelv egyéb elõírásainak. |
| Finnish | Telit Communications S.p.A. vakuuttaa täten että 2G/3G/LTE module tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen. |
| French | Par la présente Telit Communications S.p.A. déclare que l'appareil 2G/3G/LTE module est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE. |
| Icelandic | Hér með lýsir Telit Communications S.p.A. yfir því að 2G/3G/LTE module er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 1999/5/EC |
| Italian | Con la presente Telit Communications S.p.A. dichiara che questo 2G/3G/LTE module è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE. |

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

| | |
|---|---|
| Latvian | Ar šo Telit Communications S.p.A. deklarē, ka 2G/3G/LTE module atbilst Direktī vas 1999/5/EK būtiskajām prasī bām un citiem ar to saistī tajiem noteikumiem. |
| Lithuanian | Šiuo Telit Communications S.p.A. deklaruoja, kad šis 2G/3G/LTE module atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas. |
| Maltese | Hawnhekk, Telit Communications S.p.A., jiddikjara li dan 2G/3G/LTE module jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Dirrettiva 1999/5/EC. |
| Norwegian | Telit Communications S.p.A. erklærer herved at utstyret 2G/3G/LTE module er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 1999/5/EF. |
| Polish | Niniejszym Telit Communications S.p.A. oświadcza, że 2G/3G/LTE module jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC |
| Portuguese | Telit Communications S.p.A. declara que este 2G/3G/LTE module está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE. |
| Slovak | Telit Communications S.p.A. týmto vyhlasuje, že 2G/3G/LTE module spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES. |
| Slovenian | Telit Communications S.p.A. izjavlja, da je ta 2G/3G/LTE module v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES. |
| Spanish | Por medio de la presente Telit Communications S.p.A. declara que el 2G/3G/LTE module cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE. |
| Swedish | Härmed intygar Telit Communications S.p.A. att denna 2G/3G/LTE module står I överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG. |

In order to satisfy the essential requirements of 1999/5/EC Directive, the LE910-EUG module is compliant with the following standards:

| | |
|---|---|
| RF spectrum use (R&TTE art. 3.2) | EN 300 440-2 V1.4.1<br>EN 301 511 V9.0.2<br>EN 301 908-1 V6.2.1<br>EN 301 908-2 V5.4.1<br>EN 301 908-13 V5.2.1 |
| EMC (R&TTE art. 3.1b) | EN 301 489-1 V1.9.2<br>EN 301 489-3 V1.6.1<br>EN 301 489-7 V1.3.1<br>EN 301 489-24 V1.5.1 |
| Health & Safety (R&TTE art. 3.1a) | EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + AC:2011<br>EN 62311:2008<br>EN 62479:2010 |

The conformity assessment procedure referred to in Article 10 and detailed in Annex IV of Directive 1999/5/EC has been followed with the involvement of the following Notified Body:

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

AT4 wireless, S.A.
Parque Tecnologico de Andalucía
C/ Severo Ochoa 2
29590 Campanillas – Málaga
SPAIN
Notified Body No: 1909

Thus, the following marking is included in the product:

CE 1909

The full declaration of conformity can be found on the following address:
http://www.telit.com/

There is no restriction for the commercialisation of the LE910-EUG modules in all the countries of the European Union.

Final product integrating this module must be assessed against essential requirements of the 1999/5/EC (R&TTE) Directive. It should be noted that assessment does not necessarily lead to testing. Telit Communications S.p.A. recommends carrying out the following assessments:

| | |
|---|---|
| RF spectrum use (R&TTE art. 3.2) | It will depend on the antenna used on the final product. |
| EMC (R&TTE art. 3.1b) | Testing |
| Health & Safety (R&TTE art. 3.1a) | Testing |

Alternately, assessment of the final product against EMC (Art. 3.1b) and Electrical safety (Art. 3.1a) essential requirements can be done against the essential requirements of the EMC and the LVD Directives:

- Low Voltage Directive 2006/95/EC and product safety
- Directive EMC 2004/108/EC for conformity for EMC

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 14.2. FCC/IC Regulatory notices (LE910)

**Modification statement**

Telit has not approved any changes or modifications to this device by the user. Any changes or modifications could void the user's authority to operate the equipment.

*Telit n'approuve aucune modification apportée à l'appareil par l'utilisateur, quelle qu'en soit la nature. Tout changement ou modification peuvent annuler le droit d'utilisation de l'appareil par l'utilisateur.*

**Interference statement**

This device complies with Part 15 of the FCC Rules and Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

*Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.*

**Wireless notice**

This equipment complies with FCC and IC radiation exposure limits set forth for an uncontrolled environment. The antenna should be installed and operated with minimum distance of 20 cm between the radiator and your body. Antenna gain must be below:

| Frequency band | LE910-NAG | LE910-NVG | LE910-SVG |
|---|---|---|---|
| 700 MHz | 8.74 dBi | 9.16 dBi | 6.93 dBi |
| 850 MHz | 6.93 dBi | 9.42 dBi | N/A |
| 1700 MHz | 5.00 dBi | 5.00 dBi | 5.00 dBi |
| 1900 MHz | 2.51 dBi | 8.01 dBi | N/A |

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

*Cet appareil est conforme aux limites d'exposition aux rayonnements de la IC pour un environnement non contrôlé. L'antenne doit être installé de façon à garder une distance minimale de 20 centimètres entre la source de rayonnements et votre corps. Gain de l'antenne doit être ci-dessous:*

| ***Bande de fréquence*** | **LE910-NAG** | **LE910-NVG** | **LE910-SVG** |
|---|---|---|---|
| 700 MHz | 8.74 dBi | 9.16 dBi | 6.93 dBi |
| 850 MHz | 6.93 dBi | 9.42 dBi | N/A |
| 1700 MHz | 5.00 dBi | 5.00 dBi | 5.00 dBi |
| 1900 MHz | 2.51 dBi | 8.01 dBi | N/A |

*L'émetteur ne doit pas être colocalisé ni fonctionner conjointement avec à autre antenne ou autre émetteur.*

**FCC Class B digital device notice**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**Labelling Requirements for the Host device**

The host device shall be properly labelled to identify the modules within the host device. The certification label of the module shall be clearly visible at all times when installed in the host device, otherwise the host device must be labelled to display the FCC ID and IC of the module, preceded by the words "Contains transmitter module", or the word "Contains", or similar wording expressing the same meaning, as follows:

LE910-NAG

Contains FCC ID: RI7LE910NA
Contains IC: 5131A-LE910NA

LE910-NVG

Contains FCC ID: RI7LE910NV
Contains IC: 5131A-LE910NV

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

LE910-SVG

Contains FCC ID: RI7LE910SV
Contains IC: 5131A-LE910SV

*L'appareil hôte doit être étiqueté comme il faut pour permettre l'identification des modules qui s'y trouvent. L'étiquette de certification du module donné doit être posée sur l'appareil hôte à un endroit bien en vue en tout temps. En l'absence d'étiquette, l'appareil hôte doit porter une étiquette donnant le FCC ID et le IC du module, précédé des mots « Contient un module d'émission », du mot « Contient » ou d'une formulation similaire exprimant le même sens, comme suit :*

*LE910-NAG*

*Contains FCC ID: RI7LE910NA*
*Contains IC: 5131A-LE910NA*

*LE910-NVG*

*Contains FCC ID: RI7LE910NV*
*Contains IC: 5131A-LE910NV*

*LE910-SVG*

*Contains FCC ID: RI7LE910SV*
*Contains IC: 5131A-LE910SV*

**CAN ICES-3 (B) / NMB-3 (B)**

This Class B digital apparatus complies with Canadian ICES-003.

*Cet appareil numérique de classe B est conforme à la norme canadienne ICES-003.*

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

## 14.3. Conformity Assessment Issues / Problèmes d'évaluation de conformité (DE910)

The DE910 is FCC/IC Approved as a module to be installed in other devices. This device should be used only for fixed and mobile applications and if the final product after integration is intended for portable use, a new application and FCC is required.

Le DE910 est approuvé FCC/IC comme module à installer dans d'autres dispositifs. Ce dispositif doit être utilisé uniquement pour des applications fixes et mobiles et si le produit fini est prévu après intégration pour un usage portatif, une nouvelle application et la FCC est requise

The user is cautioned that this device should be used only as specified within this manual to meet RF exposure requirements.

L'utilisateur est averti que ce dispositif doit être utilisé uniquement comme spécifié dans ce manuel pour répondre aux normes d'exposition aux ondes rf.

Use of this device in a manner inconsistent with this manual could lead to excessive RF exposure conditions.

L'utilisation de ce dispositif en quelque sorte contradictoire avec ce manuel a pu mener aux états excessifs d'exposition de rf.

The DE910 conforms to the following US Directives:

- Use of RF Spectrum. Standards: FCC47 Part 22&24
- EMC Standards: FCC47 Part 15

Le DE910 est conforme aux directives suivantes des USA

- Utilisation de spectre de rf. Normes : FCC47 partie 22&24
- Normes d'EMC : FCC47 partie 15

This device complies with Part 15 of the FCC Rules.

Ce dispositif est conforme à la partie 15 des règles FCC.

Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le fonctionnement est sujet aux deux conditions suivantes :

(1) ce dispositif peut ne pas causer l'interférence nocive, et
(2) ce dispositif doit accepter aucune interférence, y compris un interférence qui pourrait causer le fonctionnement non désiré du dispositif.

The user must refer to below information to meet the FCC/IC's RF exposure rules and regulations when they design:

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

Lors de la conception, l'utilisateur doit se référer à l'information ci-dessous pour remplir les conditions et règlementations FCC/IC' d'exposition aux ondes RF:

- The system antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all the persons and must not be co-located or operating in conjunction with any other antenna or transmitter.
  Le système d'antenne utilisé pour cet émetteur doit être installé à une distance d'au moins de 20 cm de toute personne et ne doit pas être co-implanté ou opérer en même temps que n'importe quelle autre antenne ou émetteur.
- The system antenna(s) used for this module must not exceed 5.12dBi in CDMA BC0 and 6.12dBi in CDMA BC1 for mobile and fixed or mobile operating configurations.
  Le système d' antenne utilisé pour ce module ne doit pas dépasser 5.12dBi en CDMA BC0 et 6.12dBi en CDMA BC1 pour des configurations mobiles et fixes ou des configurations opérant en mode mobile.
- Users and installers must be provided with antenna installation instructions and transmitter operating conditions for satisfying RF exposure compliance.
  Manufacturers of mobile, fixed or portable devices incorporating this module are advised to clarify any regulatory questions and to have their complete product tested and approved for FCC compliance.
  Les instructions d'installation de l'antenne ainsi que les conditions de fonctionnement de l'émetteur doivent être remis aux utilisateurs et aux installateurs conformément à la règlementation sur l'exposition aux ondes rf. Des fabricants des dispositifs mobiles, fixes ou portables incorporant ce module sont invités à clarifier toutes les questions de normalisation et à avoir leur produit complètement testé pour la mise en conformité FCC.
- DE910 is intended for the OEM integrator only.
  DE910 est prévu pour l'intégrateur OEM seulement.
- The user is required to see the Grant of Equipment document for other restrictions.
  L'utilisateur doit se referrer au document « Grant of equipment » pour d'autres restrictions.
- DE910 must be operated and used with a locally approved access point.
  DE910 doit être actionné et utilisé avec un point d'accès localement approuvé.
- The radio transmitter(IC ID: 5131A-DE910DUAL) has been approved by Industry Canada to operate with the antenna type listed in this manual with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.
  L'émetteur radio (identification d'IC : 5131A-DE910DUAL) a été approuvé par Industry Canada pour fonctionner avec le type d'antenne énuméré dans ce manuel avec le gain autorisé maximum et l'impédance d'antenne exigée pour chaque type d'antenne indiqué. Les types d'antenne non inclus dans cette liste, ayant un gain supérieur au gain maximum indiqué pour ce type, sont strictement interdits pour un usage avec ce dispositif.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

The following regulatory and safety notices must be published in documentation supplied to the end user of the product or system incorporating an adapter in compliance with local regulations.

- Host system including DE910 must be labeled with
  "Contains transmitter module with
  FCC ID: RI7DE910-DUAL and IC ID: 5131A-DE910DUAL"

Les notices de normalisation et de sécurité doivent se trouver dans la documentation fournie à l'utilisateur du produit ou du système incorporant un adaptateur conforme aux règlementations locales.

- Le système hôte comprenant DE910 doit être marqué avec « Contient un module émetteur avec IDENTIFICATION FCC : RI7DE910-DUAL et identification IC : 5131A-DE910DUAL »

## 14.4. Safety Recommendations (DE910)

**READ CAREFULLY**

Be sure the use of this product is allowed in the country and in the environment required. The use of this product may be dangerous and has to be avoided in the following areas:

- Where it can interfere with other electronic devices in environments such as hospitals, airports, aircrafts, etc.
- Where there is risk of explosion such as gasoline stations, oil refineries, etc. It is the responsibility of the user to enforce the country's regulations and the specific environmental regulation.

Do not disassemble the product; any evidence of tampering will compromise the warranty validity. Follow the instructions of the hardware user guides for a correct wiring of the product. The product has to be supplied with a stabilized voltage source and the wiring has to conform to the security and fire prevention regulations. The product has to be handled with care, avoiding any contact with the pads because electrostatic discharges may damage the product itself.
The system integrator is responsible for the functioning of the final product; therefore, care has to be taken with the external components of the module as well as of any project or installation issue because of the risk of disturbing the CDMA network or external devices or having impact on security. Should there be any doubt, please refer to the technical documentation and the regulations in force. Every module has to be equipped with a proper antenna with specific characteristics. The antenna has to be installed with care in order to avoid any interference with other electronic devices and has to guarantee a minimum distance from the body (20 cm). In case this requirement cannot be satisfied, the system integrator has to assess the final product against SAR regulations.

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 

# 15. Document History

| Revision | Date | Changes |
|---|---|---|
| ISSUE#0 | 2012-05-08 | First issue |
| ISSUE#1 | 2012-27-07 | 3.1 PINOUT updated<br>9 Wake functionality and new example<br>10 Audio section added<br>11 Mechanical layout drawing changed |
| ISSUE#2 | 2012-25-09 | Minor grammatical corrections |
| ISSUE#3 | 2012-11-22 | Minor grammatical corrections.<br>4.2 peak current requirement raised to 2.4A<br>5 sensitivity and output power (modify)<br>8 SH note added. Capacitor on SIMVCC changed from 1uF to 100 nF.<br>11 new drawing<br>Added chapters 5.3.1, 5.3.2, 11.1, 11.2 |
| ISSUE#4 | 2013-08-22 | Temperature Range modified |
| ISSUE#5 | 2014-04-08 | Updated chapter 11.2 |
| ISSUE#6 | 2014-05-16 | Updated chapter 11 |
| ISSUE #7 | 2014-08-06 | Added LE910 and DE910<br>Updated document's tables |

Reproduction forbidden without Telit Communications S.p.A. written authorization - All Rights Reserved 